



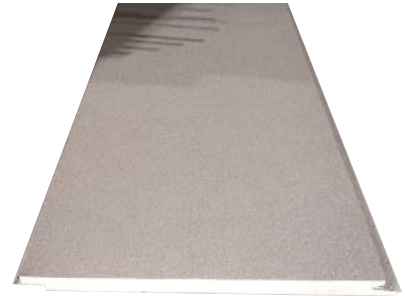

# Interlock Skirting

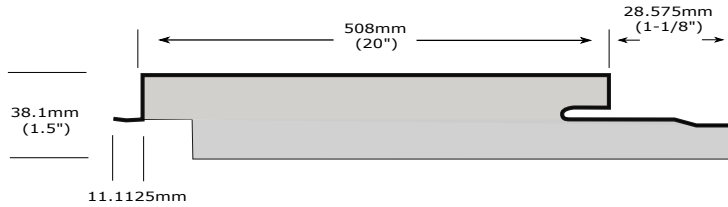

## Standard Features

Core Thickness	Steel Cladding	R-Value	Weight
----------------	----------------	---------	--------

50.8mm (1.5")	G90-gr33 26 gauge Galvanize	RSI .986 (R 5.6)	12.9 kg
------------------	-----------------------------------	---------------------	---------

**Higher R-Value and insulation thickness available upon request**

## Classifications / Configuration

Panel size 805mm (20") x 3657.6mm (144") coverage 1.858 sq/meters (20 sq/ft)

Steel Cladding 26ga Galvannealed steel G90 gr33 / 24ga Galvalume steel gr50


Insulation EPS bead board

Coatings Water-borne Acrylic Polyurethane Enamel (Variable Substrate Technology)

Supporting Trim 55% Aluminum-Zinc Coated Steel ASTM 792  
SMP Pre-painted Steel AZ50 Substrate

Install Horizontal / Vertical

Classifications CAN/ULC-S701  
CCMC 12424-L  
CCMC 12425-L  
CCMC 12426-L  
ICC-ES ESR-1587



Sound Suppression



Thermal *Insulation*



Energy Saving



Ph: 587-425-2400  
office@trimlock.ca  
www.trimlock.ca  
#3-731- 30th Street North  
Lethbridge AB T1H 5G5