

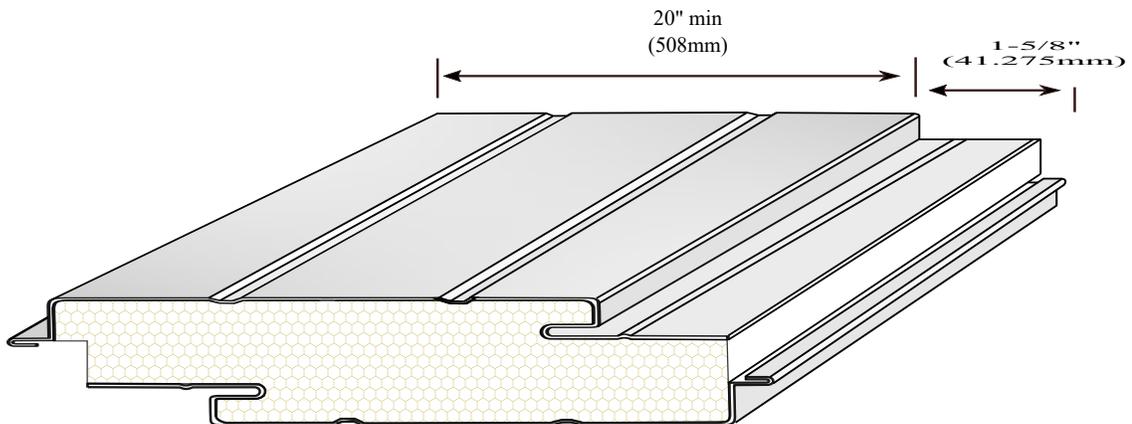
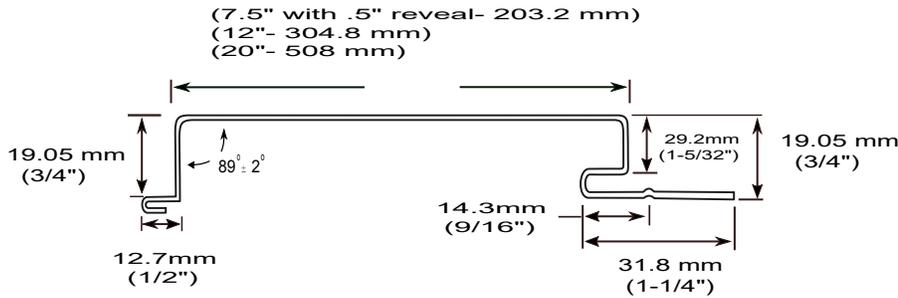


SPECIFICATIONS & TYP. DETAILS

RECOMMENDED FASTENERS		
FASTENER	SIZE	
EXTERIOR COATED GALVANIZED SCREW	#8 - #10 @ 2-1/4" MIN 57.15mm	
EXTERIOR COATED GALVANIZED RING NAIL	2-1/4" MIN 57.15mm	
EXTERIOR COATED GALVANIZED SELF DRILLING STEEL SCREW	2-1/4" MIN 57.15mm	
POLYURETHANE ADHESIVE LOW EXPANDING BUTYL SEALANT FIRE STOP SEALANT CONSULT TRIMLOCK FOR DETAILS		

FRAMING RECOMMENDATIONS	
FRAMING MATERIAL	SUPPORT SPAN
2X6 WOOD	16"O/C
STEEL STUD	16"O/C

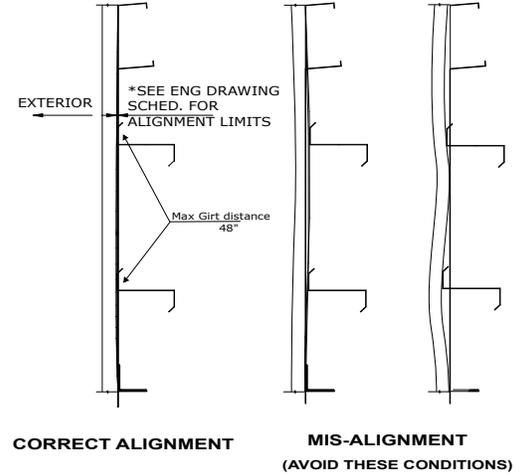

20" WALL PANEL PROFILE 4" THICK